



# FLIR A6600/A6650

High Speed Thermal Imaging Camera with FLIR Cooled InSb Detector

Manufacturing and process engineering specialists use thermal imaging cameras with great success for a full range of automation applications. Practical uses include: automated inspections, process control, condition monitoring, fire prevention & detection, and continuous optical gas imaging.

Powerful cooled FLIR A66xx-Series thermal cameras can help you see minute temperature differences, capture high speed processes and thermal events, measure temperatures of very small targets, and synchronize with other measuring devices.

## HIGH SENSITIVITY, CRISP THERMAL IMAGES

FLIR A66xx-Series incorporates a cooled FLIR Indium Antimonide (InSb) detector that operates in the 3- to 5-micron waveband. The camera produces crisp thermal images of 640 x 512 pixels. Achieving a high thermal sensitivity of <20 mK, FLIR A66xx-Series is able to capture the finest image details.

## FAST INTEGRATION TIMES

Working in snapshot mode, FLIR A66xx-Series cameras are able to capture all pixels from a scene simultaneously. This is particularly important when monitoring fast-moving objects where an uncooled thermal imaging camera would suffer from image blur. The A6600 supports image frame rates up to 480 frames per second when operating in windowing mode. The A6650 supports frame rates up to 4,175 frames per second when operating in a 16 x 4 pixel window.

## STANDARD VIDEO INTERFACES


FLIR A66xx-Series uses a standard GigE Vision™ / GenICam interface to transmit both commands and full dynamic range digital video. Additional interfaces include a BNC analog video output. The Gigabit Ethernet and analog video are simultaneously active yet independently controlled allowing greater flexibility for recording and display purposes.

## CUSTOM COLD FILTERS AVAILABLE

Custom cold filtering options for specific spectral detection and measurement are available. Perfect for imaging through glass, measuring temperature of thin film plastics, filtering different wavebands for laser profiling and detection, or optical gas imaging.

## SOFTWARE

A Software Developer's Kit (SDK) is optionally available.

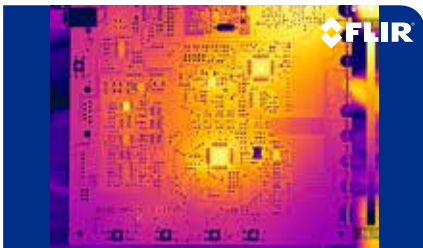


High resolution inspection of PCB board



Through glass inspection of light bulb filament

## Imaging Specifications

System Overview	FLIR A6600		FLIR A6650
Detector Type	FLIR Indium Antimonide (InSb)		
Spectral Range	3 – 5 µm or 1 - 5 µm		
Resolution	640 × 512		
Detector Pitch	15 µm		
NETD	<20 mK (18 mk typical)		
Well Capacity	7.2 M electrons		
Operability	>99.8% ( >99.95% typical)		
Sensor Cooling	FLIR Closed Cycle Rotary		
Electronics / Imaging			
Readout	Snapshot		
Readout Modes	Asynchronous Integrate While Read; Asynchronous Integrate Then Read		
Synchronization Modes	Frame Sync		
Integration Time	500 ns to full frame		
Subwindow Modes	Full, 1/2 or 1/4 Window	Flexible (16x4 incr.)	
Max Frame Rate	60Hz @ Full Window 240Hz @ 1/2 Window 480 Hz@ 1/4 Window	125Hz @ Full Window 409Hz @ 1/2 Window 1077Hz @ 1/4 Window 4175Hz @ 16x4 pixels Window	
DRX	No	Yes	
Dynamic Range	14-bit		
Digital Data Prototcol	Gigabit Ethernet (GigE Vision 2.0)		
Analog Video	NTSC, PAL		
Camera Control	GenICam		
Trigger In (Record Start)	No	Yes	
Sync OUT	No	Yes	
AUX Connector (RS-232, GPIO)	No	Yes	
Measurement			
Standard Temperature Range	-20°C to 350°C (-4°F to 662°F)		
Optional Temperature Range	Up to 1,500°C (2,732°F) Up to 2,000°C (3,632°F)		
Accuracy	± 2°C or ±2% of reading		
Optics			
f/#	f/4.0 or f/2.5		
Available Lenses	3-5µm: 13mm, 13mm (low distortion), 25mm, 50mm, 100mm (all lenses are f/2.5) 1-5µm: 25mm, 50mm, 100mm (lenses are f/2.5)		
Microscopes	1x (this lens is f/4 and requires an f/4 camera)		
Focus	Manual		
Filtering	Removable Behind the Lens or Permanent “cold” Filter Available		
Analog Video			
Analog Palettes	Selectable 8-bit		
AGC	Manual, Linear, Plateau Equalization, DDE		
Digital Zoom	Video Zoom is Auto Selected: 1x for Full and 1/2 window, 2x for 1/4 window		
General			
Operating Temperature Range	-40°C to 50°C (-40°F to 122°F)		
Storage Temperature Range	-55°C to 80°C (-67°F to 176°F)		
Shock / Vibration	40 g , 11 msec ½ sine pulse / 4.3 g RMS Random Vibration, All 3 Axis		
Power	24 VDC ( < 50 W steady state)		
Weight w/o Lens	5 lbs / 2,3 kg		
Size (L × W × H ) w/o Lens	8.5 × 4.0 × 4.3” / 21.6 × 10.2 × 10.9cm		
Mounting	2 × ¼”-20, 1 × 3/8”– 16, 4 × 10/24		

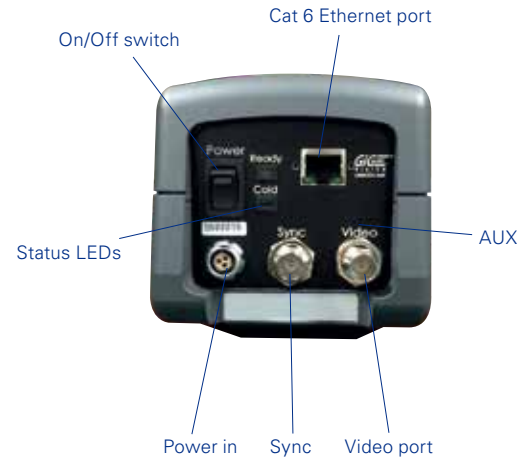

**Your authorized FLIR distributor:**

**moviTherm**  
advanced thermography solutions

15540 Rockfield Blvd, Suite C-110  
Irvine, CA 92618

Phone: (949) 699-6600

Fax: (949) 699-6601

Email: [info@movitherm.com](mailto:info@movitherm.com)

<http://www.movitherm.com>

**FLIR Systems Trading  
Belgium BVBA**  
Luxemburgstraat 2  
B-2321 Meer  
Belgium  
PH: +32 (0) 3 665 51 00

**FLIR Systems Ltd.**  
920 Sheldon Ct  
Burlington, Ontario  
L7L 5K6 Canada  
PH: +1 800 613 0507

**FLIR Systems, Inc.**  
9 Townsend West  
Nashua, NH 06063  
USA  
PH: +1 603.324.7611

**FLIR Systems UK**  
2 Kings Hill Avenue -  
Kings Hill  
West Malling  
Kent  
ME19 4AQ  
United Kingdom  
PH: +44 (0)1732 220 011

**FLIR Systems AB**  
Antennvägen 6,  
PO Box 7376  
SE-187 66 Täby  
Sweden  
PH: +46 (0)8 753 25 00

[www.flir.com](http://www.flir.com)  
[flir@flir.com](mailto:flir@flir.com)  
NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice.  
©2015 FLIR Systems, Inc. All rights reserved. [Created 07/15]