

UniTHERM

Thermal Camera Monitoring System



UniTHERM

Single Camera Thermal Imaging System

UniTHERM is a freely configurable thermal vision system. It comes with one FLIR Thermal Camera.

UniTHERM is ideal for quality control applications, monitoring of production parameters and any other application with the need to monitor temperatures. The built-in recipe manager allows UniTHERM to be adapted to almost any application.


Start improving your process today!

UniTHERM – Feature Highlight

- ✓ Single Camera Thermal Imaging
- ✓ Recipe Manager with Unlimited Inspection Recipes
- ✓ Intuitive User Interface with Touchscreen
- ✓ Data & Image Logging
- ✓ Temperature Trend Graph
- ✓ Industrial I/O & Communications Interface
- ✓ Ethernet
- ✓ NEMA4, NEMA4x (Wash down) available
- ✓ Ex-Proof (Class 1/Div II) available

UniTHERM – Applications

- ✓ Package Seal and Plastic Welding Inspection
- ✓ Food Processing & Cooking Temperatures
- ✓ Metal Quenching, Annealing, Welding
- ✓ Injection Mold & Part Monitoring
- ✓ Automotive Die Cast Monitoring
- ✓ Hot Glue Verification
- ✓ Drying Verification
- ✓ Plastic Film Temperature Distribution

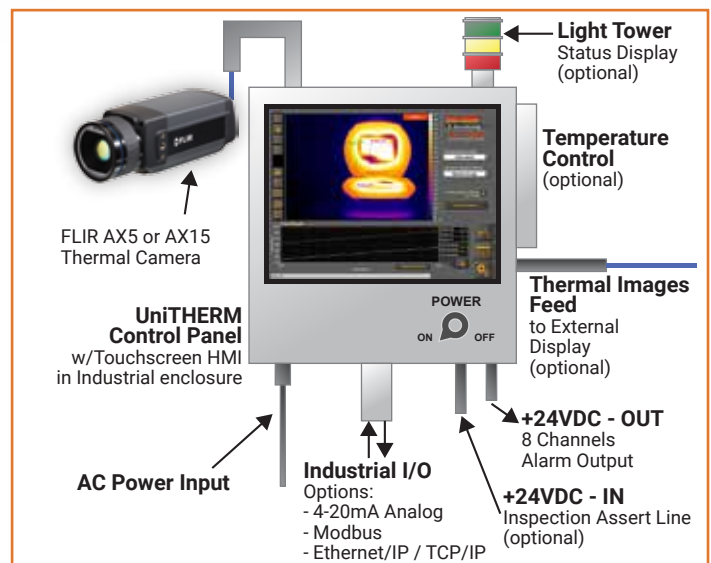

UniTHERM

Thermal Camera Monitoring System

What is Included?

- ✓ One FLIR Thermal Cameras, with two choices of resolution
- ✓ Available Camera Resolution either 320 x 240 or 640 x 480 pixels
- ✓ UniTHERM Controller, Wall-mount Enclosure, Panel PC with Touchscreen
- ✓ All necessary support electronics, power supply and cabling

How can UniTHERM interface to my equipment?

The system offers flexible interface options. This allows the user to interface existing equipment to access status information, pass/fail, system health and inspection data through various interfaces.

- ✓ 24VDC discrete I/O
- ✓ 4-20mA Current Loop Output
- ✓ Ethernet/IP and ModBUS TCP

What is required for installation?

All that is required for the installation of UniTHERM is standard 110VAC/15A power and one Ethernet cable to each of the cameras. Both cameras are powered over Ethernet (PoE)*, which makes installing the cameras very convenient. No additional power supplies or cables are required.

* Only applicable to FLIR A35/A65

Does MoviTHERM help with commissioning?

Absolutely! In fact, we recommend hiring MoviTHERM for the commissioning and training phase of the system deployment. Nobody knows our systems better than us. We design and build them! Additionally, you gain access to thermography experts to assure that you achieve the best return on investment. We recommend allocating 1 to 2 days for the deployment of a single system.

"Implementing a Thermal Imaging System used to be daunting and risky task."



MoviTHERM has made it its mission to greatly simplify this process.

We have taken more than a decade of our thermal imaging experience and boiled it down to an easy to use, user friendly solution – "UniTHERM". All the complicated elements are taken care off in the background, hidden from the user. With UniTHERM, we have eliminated risk and learning curve, so you can focus on what's important to your process from day one!

Markus Tarin, President & CEO

Supported Cameras

Depending on the requirements of your application, one Model of the following FLIR® thermal Cameras is supported:

	FLIR® A35	FLIR® A65	FLIR® A315	FLIR® A615	FLIR® A6601 / A6651
					
IR resolution	320 x 256 pixels	640 x 512 pixels	320 x 240 pixels	640 x 480 pixels	640 x 512 pixels
Image frequency	60 Hz	7.5 Hz / 30Hz	60Hz	50 Hz (100/200 Hz with windowing)	60 Hz 125 Hz @ full window
Object temperature range	-25°C to +135°C (-13 to 275°F) -40°C to +550°C (-40 to 1022°F)	-25°C to +135°C (-13 to 275°F) -40°C to +550°C (-40 to 1022°F)	-20 to +120°C (-4 to 248°F) 0 to +350°C (32 to 662°F)	-20 to +150°C +100 to +650°C +300 to +2000°C	-20°C to 350°C (-4°F to 662°F) Optional Up to 1,500°C (2,732°F) Up to 2,000°C (3,632°F)
Accuracy	±5°C (±9°F) or ±5%	±5°C (±9°F) or ±5%	±2°C or ±2% of reading	±2°C or ±2% of reading	±2°C or ±2% of reading
Ethernet, Communication	GigE Vision ver. 1.2 Client API GenlCam compliant	GigE Vision ver. 1.2 Client API GenlCam compliant	TCP/IP socket-based FLIR proprietary and GenlCam protocol	TCP/IP socket-based FLIR proprietary and GenlCam protocol	Gigabit Ethernet (GigE Vision 2.0)