




## COMPACT MWIR HD THERMAL CAMERA

# FLIR A8580



The FLIR A8580 MWIR High Definition Thermal Camera provides best-in-class imagery for industrial, military, and manufacturing R&D applications. The 1.3 MP detector produces beautiful, crisp images while the new built-in 4-position warm filter wheel allows the camera to easily measure temperatures up to 3,000°C. With the support for optional remote motor-focus lenses in addition to the standard manual focus and microscope lens options, users can maximize the number of measurement pixels on the object being tested and optimize focusing to ensure accurate temperature measurements regardless of size or distance. Simple, single cable connectivity using Gigabit Ethernet or CoaXPress provides complete camera control plus data capturing in FLIR Research Studio software, so users can analyze and understand data faster than ever before.

[www.flir.com/A8580-MWIR](http://www.flir.com/A8580-MWIR)

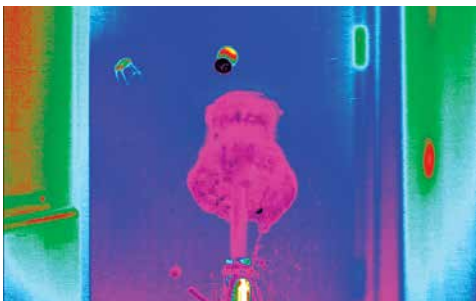


### ADVANCED FEATURES FOR OPTIMAL FLEXIBILITY

Capture meaningful thermal data even in the most demanding applications

- Ensure your images are always crisp with the auto and remote focusing capabilities of the optional motor-focus lenses
- Effortlessly measure high temperature objects using the internal 4-position filter wheel preloaded with neutral density filters\*
- Capture the data you need when you need it with advanced triggering and synchronization capabilities

\*Neutral density filters are optional

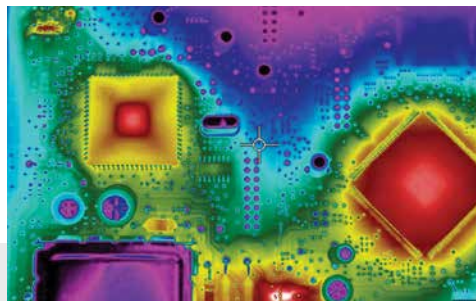

### SUPERIOR RESOLUTION AND MEASUREMENT ACCURACY

Get accurate thermal data on your entire device and individual subcomponents

- Analyze and record stunning 1.3 MP (1280 × 1024) resolution thermal images
- Detect thermal difference down to <math><30\text{ mK}</math> with measurement accuracy of better than  $\pm 2\%$
- Choose from a range of lenses to ensure the maximum number of measurement pixels on the test article—regardless of size or distance from the camera
- Accurately measure temperatures on small objects with optional microscope lenses for spatial resolution down to  $4\ \mu\text{m}/\text{pixel}$



### SIMPLIFIED DATA ANALYSIS, SHARING, & COLLABORATION

Start collecting and sharing meaningful data with limited ramp-up time and simple connections

- Control all camera parameters and stream fully radiometric thermal data at more than 44 Hz using Gigabit Ethernet and CoaXPress
- Employ FLIR Research Studio's simple Connect → View → Record → Analyze workflow to obtain and analyze thermal results quickly
- Work in the operating system you prefer and share data globally with colleagues in their preferred language

## SPECIFICATIONS

MWIR Model names	A8580	A8581	A8582	A8583
Detector Type	FLIR Indium antimonide (InSb)			
Spectral range	1.5–5.0 $\mu\text{m}$	3.0–5.0 $\mu\text{m}$	1.5–5.0 $\mu\text{m}$	3.0–5.0 $\mu\text{m}$
Resolution	1280 $\times$ 1024			
Pixel size	12 $\mu\text{m}$			
Thermal sensitivity/NEdT	$\leq 40$ mK ( $\leq 30$ mK typical)	$\leq 30$ mK ( $\leq 25$ mK typical)	$\leq 40$ mK ( $\leq 30$ mK typical)	$\leq 30$ mK ( $\leq 25$ mK typical)
Well capacity	Gain 0: 3.0 Me-, Gain 1: 11.5 Me-			
Operability	$\geq 99.5\%$ ( $\geq 99.9\%$ typical)			
Sensor cooling	Linear Sterling cooler			
<b>Electronics</b>				
Readout	Snapshot			
Readout modes	Asynchronous integrate while read, Asynchronous integrate then read			
Synchronization modes	Sync In, Sync Out			
Image time stamp	Yes			
Integration time	480 ns to ~full frame			
Pixel clock	100 MHz			
Frame rate (full window)	Programmable; Up to ~45 Hz (GigE), 60 Hz (CXP)			
Subwindow mode	Flexible windowing down to 32 $\times$ 4 (steps of 32 columns, 4 rows)			
Dynamic range	14-bit			
On-camera image storage	None			
Radiometric data streaming	Gigabit Ethernet (GigE Vision), CoaXPress			
Standard video	HD-SDI			
Command and control	GenICam (GigE, CXP), RS-232			
<b>Measurement</b>				
Standard temperature range	-20°C to 300°C (-4°F to 572°F)	-20°C to 350°C (-4°F to 662°F), -10°C to 350°C (14°F to 662°F) for microscopes	20°C to 350°C (-4°F to 662°F)	-20°C to 350°C (-4°F to 662°F), -10°C to 350°C (14°F to 662°F) for microscopes
Optional temperature range (with band-matched optics)	45°C to 600°C (ND1); 250°C to 2000°C (ND2); 500°C to 3000°C (ND3)			
Accuracy	$\pm 2^\circ\text{C}$ ( $\pm 1^\circ\text{C}$ typical) below 100°C, $\pm 2\%$ of reading ( $\pm 1\%$ typical) above 100°C			
Ambient drift compensation (with factory calibration)	Yes			
<b>Optics</b>				
Camera f/#	f/2.5	f/2.5	f/4	f/4
Available lenses	Manual (broadband): 25 mm, 50 mm, 100 mm. Motorized: TBA	Manual or Motorized: 17 mm, 25 mm, 50 mm, 100 mm, 200 mm	Manual (broadband): 25 mm, 50 mm, 100 mm. Motorized: TBA	Manual or Motorized: 17 mm, 25 mm, 50 mm, 100 mm, 200 mm
Close-up lenses / microscopes	—	1 $\times$ (12 $\mu\text{m}/\text{pixel}$ ) or 3 $\times$ (4 $\mu\text{m}/\text{pixel}$ )	—	1 $\times$ (12 $\mu\text{m}/\text{pixel}$ ) or 3 $\times$ (4 $\mu\text{m}/\text{pixel}$ )
Lens interface	FLIR FPO-M (4-tab bayonet, motorized)			
Focus	Motorized (compatible w/manual lenses)			
Filter holder (warm)	Internal 4-position motorized filter wheel; factory installed filters			
<b>Image/video presentation</b>				
Palettes	Selectable 8-bit			
Automatic gain control	Manual, linear, plateau equalization, DDE			
Overlay	Fixed configuration, can be turned off			
Video modes	SDI: 720p at 50/59.9/60 Hz, 1080p at 25/29.9/30 Hz			
Standard video zoom	Automatic, variable			
<b>General</b>				
Operating temperature range	-20°C to 50°C (-4°F to 122°F)			
Shock / vibration	40 g, 11 msec $\frac{1}{2}$ sine pulse/4.3 g RMS random vibration, all 3 axes			
Power	24 VDC (< 24 W steady state)			
Weight w/o lens	2.3 kg (5 lbs)			
Size (L $\times$ W $\times$ H) w/o lens	226 $\times$ 102 $\times$ 109 mm (8.9 $\times$ 4.0 $\times$ 4.3 in.)			
Mounting	2x $\frac{1}{4}$ " -20 tapped holes, 1x $\frac{3}{8}$ " -16 tapped hole, 4x 10-24 tapped holes			

CORPORATE HEADQUARTERS  
FLIR Systems, Inc.  
27700 SW Parkway Ave.  
Wilsonville, OR 97070  
PH: +1 877.773.3547

NASHUA  
FLIR Systems, Inc.  
9 Townsend West  
Nashua, NH 06063  
USA  
PH: +1 603.324.7611

CANADA  
FLIR Systems Ltd.  
3430 South Service Rd, Ste 103  
Burlington, Ontario L7N 3T9  
Canada  
PH: +1 800 613 0507

LATIN AMERICA  
FLIR Systems Brasil  
Av. Antonio Bardella, 320  
Sorocaba, SP 18085-852  
Brasil  
PH: +55 15 3238 8070

Equipment described herein is subject to US export regulations and may require a license prior to export. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2020 FLIR Systems, Inc. All rights reserved. 01/2020

19-2762-INS-MWIR

www.flir.com  
NASDAQ: FLIR

Your authorized FLIR distributor:

**MOVITHERM**  
advanced thermography solutions

15540 Rockfield Blvd, Suite C-110  
Irvine, CA 92618

Phone: (949) 699-6600

Email: [info@movitherm.com](mailto:info@movitherm.com)

<http://www.movitherm.com>



The World's Sixth Sense®